

WORKZONE®

DIGITAL CALIPER

Manual



DC-1

List of contents

- 03 Introduction
- 04 General information
and safety notes
- 06 Assembly and scope of delivery
- 07 Preparation
- 08 Functions
- 11 Directions for use
- 13 Useful information
- 14 Guarantee
- 18 EC declaration of conformity
- 19 After sales support

You have made an excellent choice with the purchase of this quality WORKZONE® brand product.

By doing so you now have the assurance and peace of mind which comes from purchasing a product that has been manufactured to the highest standards of performance and safety, supported by the high quality standards of Aldi.

We want you to be completely satisfied with your purchase so this WORKZONE® product is backed by a comprehensive manufacturer's 3 year warranty and an outstanding after sales service through our dedicated Helpline.

We hope you will enjoy using your purchase for many years to come.

If you require technical support or in the unlikely event that your purchase is faulty please telephone our Helpline for immediate assistance. Faulty product claims made within the 3 year warranty period will be repaired or replaced free of charge provided that you have satisfactory proof of purchase (keep your till receipt safe!). This does not affect your statutory rights. However, be aware that the warranty will become null and void if the product is found to have been deliberately damaged, misused or disassembled.

General information and safety notes

2

Technical Data

Resolution:	0,01 mm
Power source:	1.5 V, LR 44 1 button battery
Measuring speed:	≤ 1,5 m/s
Operating temperature:	0 ~ + 40° C
Storage temperature:	-10° C ~ + 60° C
Relative humidity:	< 80 %



Important information:

Risk of injury: the measuring edges are sharp and pointed! Therefore, only ever take hold of the measuring device by the handles. Do not allow children to play with the measuring device. They can injure themselves on the sharp measuring edges or swallow the battery or the battery compartment cover. Measure very carefully on sensitive surfaces to avoid scratch marks.

The digital slide gauge is designed for use in a private household. It is not suitable for industrial use in workshops, etc.

Information on batteries


- Never try to recharge batteries that are not rechargeable. Explosion hazard!
- Keep batteries away from children, do not throw them into fire, do not short-circuit them and never take the batteries apart.
- Consult a physician immediately if a battery has been swallowed.
- Please observe the correct polarity when inserting the battery.
- Clean the battery and device contacts if necessary before inserting.
- Remove empty batteries from the device immediately. Increased risk of leakage!
- Do not expose the batteries to extreme conditions, e.g. on heaters. Increased risk of leakage!
- Non-observance can lead to batteries discharging beyond their end-point voltage and leaking. Remove batteries immediately in order to avoid damage. Avoid contact with skin, eyes and mucous membranes. Following contact with battery acid, rinse the areas concerned straight away with plenty of clear water and consult a physician immediately.
- Remove the battery from the device if it is not in use for a longer period of time.

Assembly and scope of delivery

3

Assembly diagram

1. Graduated measuring surface
2. Internal measuring surface
3. LCD display
4. Securing screw
5. Button battery (1.5 V)
6. Battery cover
7. Slider
8. Protective cover
9. Depth rod
10. External measuring surface
11. Electric current on/off switch
12. Zero adjuster
13. Depth rod conversion for mm/inch
14. Fine adjustment wheel

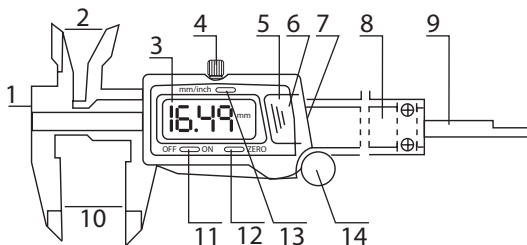

Scope of delivery

- Slide gauge
- Button battery
- Case
- Directions for use
- Guarantee card contained in the directions for use

Preparation




- Dry the surface of the measuring scale and clean the measuring surfaces.
- Loosen the securing screw and move the slider to check whether the LCD display and all keys work perfectly.

- The zero setting in any position facilitates graduated measurements. Press the “zero”, key to determine zero. This allows differential measurements (negative measurements are indicated by “-”).
- Inch/mm conversion in every position. Press the mm/inch key to display the measuring result in the other unit.
- The slide gauge can be operated particularly precisely with the fine adjustment wheel for very exact measurements.
- Automatic and manual switching on and off of the electric current.

Measureings

- a) External measuring
- b) Depth measuring
- c) Internal measuring
- d) Graduated measuring

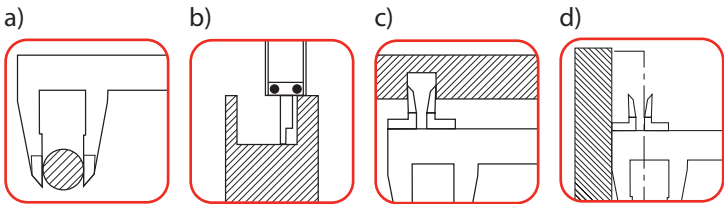

Tip

Use the fine adjustment wheel for precise measurements. It facilitates the exact adjustment of the slide gauge.

PLEASE NOTE:

In the event of electrostatic discharge onto the housing the display can reset itself or an incorrect value can be indicated. In this case the measurement must be repeated.

To this end switch the device off and then on again. Carry out zero adjustment by pressing the zero adjuster (ZERO) key.

Help table

Practical help table for cutting threads

(also see the reverse side of the slide gauge):

Column 1: screw size

Column 2: thread pitch

Column 3: min. borehole diameter

Column 4: suitable standard drill size

Metr. ISO			
Screw size Ø mm	Pitch Ø mm	Borehole Ø mm	Drill size Ø mm
3	0,5	2,46	2,5
4	0,7	3,24	3,3
5	0,8	4,13	4,2
6	1	4,92	5
8	1,25	6,65	6,8
10	1,5	8,38	8,5
12	1,75	10,11	10,2
16	2	13,84	14
20	2,5	17,29	17,5
Whitworth			
Ø in	Ø/in	Ø mm	Ø mm
1/4	20	4,72	5,0
5/16	18	6,13	6,4
3/8	16	7,49	7,7
1/2	12	9,99	10,25
5/8	11	12,92	13,25
3/4	10	15,8	16,25
7/8	9	18,61	19
1	8	21,34	21,75

Directions for use

Measuring:

- (1) Press the on/off key to switch on the electric current.
- (2) Press the mm/inch key to select the desired measuring unit.
- (3) Move the slider until two external measuring surfaces come into slight contact and then press the zero adjuster to start regular measuring. You can fix the slide gauge using the securing screw to safeguard the measuring result.
- (4) Press the on/off key to switch off the electric current; the electric current is switched off after 5 minutes if the slider is not moved any more after the end of the measurements.
- (5) The slide gauge needs a few seconds (approx. 5-6 seconds) to adjust itself after the battery is inserted. The slide gauge can only be switched on after the adjusting procedure has been completed.

Replacing the battery

Abnormal display (flickering numerals or no display at all) points to low battery voltage and the battery must be replaced. Remove the battery cover in the direction of the arrow and replace the battery by a new one.

Please contact the supplier if the battery bought on the market does not work perfectly.

Troubleshooting

- The battery plus terminal must point outward.
- Reset the zero-point of the measuring after replacing the battery.

Fault	Possible cause	Solution
Flashing display	Low voltage	Replace battery
No display	1. Low voltage 2. Loose contact	1. Replace battery 2. Adjust fit of the battery
Fixed or flickering display	Random fault in the circuit	Remove the battery and insert again after one minute

Maintenance instructions

- 1) Before use, clean the surface of the measuring scale with a dry, clean cloth (or a cloth saturated in cleaning oil). Protect the measuring scale against aqueous liquid.
- 2) Do not attach voltage to any part of the digital caliper (e.g. for engraving using an electric pen), as otherwise the circuit could be damaged.
- 3) Remove the battery if the instrument will not be in use for a longer period of time.

Useful information

7

Protection of the environment / disposal



In the interest of the protection of the environment dispose of the slide gauge professionally. Hand the slide gauge over to an electronic scrap collecting point and do not dispose of it with household refuse.



Hg, Pb

Remove the battery beforehand and dispose of it properly at a collecting point for batteries.

Packaging materials are also raw materials. Please therefore supply them to the raw materials cycle. The local administration department can inform you regarding addresses and the opening times of the collecting points.

Guarantee



Dear Customer,

Our products are subject to stringent quality control.

If this device should not function correctly please contact our service address stated below. We are also available by phone at the service hotline number stated below.

Please contact us by phone or in writing before sending a faulty device to our service centre in order to speed up handling.

There is a 3 year guarantee period that commences on the date of purchase. Please retain the receipt as proof of purchase.

During the guarantee period faulty devices can be sent to the service address stated below. You will then be sent a new or repaired device free of charge. The following applies to the assertion of claims under guarantee:

- Claims under guarantee can only be asserted within a max. period of 3 years as from date of purchase. Our guarantee is restricted to the rectification of material and production faults or the replacement of the device respectively. Our guarantee is free of charge for you.
- Claims under guarantee must be raised immediately in each case after gaining knowledge of them. The assertion of claims under guarantee after expiry of the guarantee period is excluded, unless the claims under guarantee are raised within a time-limit of 2 weeks after expiry of the guarantee period.
- Please send a faulty device together with the guarantee card and the receipt freight collect to the service address.

If the fault comes within our guarantee, you will receive a repaired or a new device.

A new guarantee period does not begin following the repair or replacement of the device. The guarantee period of 3 years as from date of purchase remains authoritative. Please observe that our guarantee expires in the case of improper or incorrect handling, non-observance of the valid safety precautions for the device, use of force, damages due to force majeure or in the case of intervention by an unauthorized service address.

If in case of repairs this device has to be sent to the service address, please be sure to pack the product appropriately. We do not accept responsibility for damages caused during transport.

After expiry of the guarantee period you also have the possibility to send the faulty device to the address stated below for repair. Repairs arising after expiry of the guarantee are subject to a charge.

We will rectify faults on the device that are not (or no longer) covered by the scope of the guarantee or damages due to which the guarantee has expired against reimbursement of the costs. For this purpose please send the device to our service address.

Your legal rights are not restricted by this guarantee.

WORKZONE®

DIGITAL CALIPER

3 YEAR GUARANTEE

Name _____

Address _____

Reason for complaint _____



Fax _____

e-mail _____

Date of purchase _____

Place of purchase _____



OVIBELL GmbH & Co. KG
Steineshoffweg 2
45479 Mülheim an der Ruhr
Germany

DC-1/01/2011



EC declaration of conformity

2006/95/EC

OVIBELL GmbH & Co. KG

Steinshoffweg 2 - 45479 Mülheim an der Ruhr

On my own authority I declare that the construction
of the

**model DC-1
digital caliper**

complies with the following pertinent regulations:

EN 61010:2001

Mülheim, a. d. Ruhr

01.01.2011

Volker Dillen
Managing Director

AFTER SALES SUPPORT



UK 0044 208 779 68 31

IRE 00353 1 443 36 30



www.ovibell-int.de

service-uk@ovibell-int.com

service-irl@ovibell-int.com

MODEL NUMBER: DC-1/01/2011

